
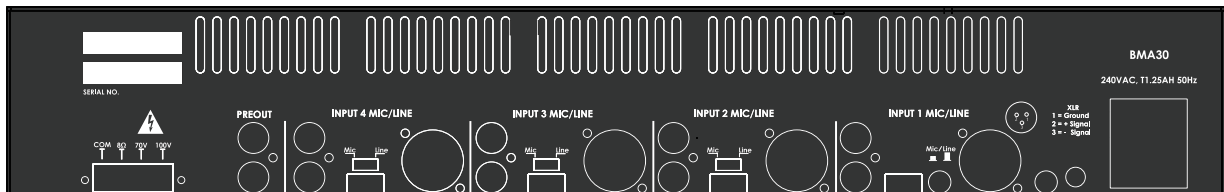


BASIC MIXER AMPLIFIERS

BMA SERIES

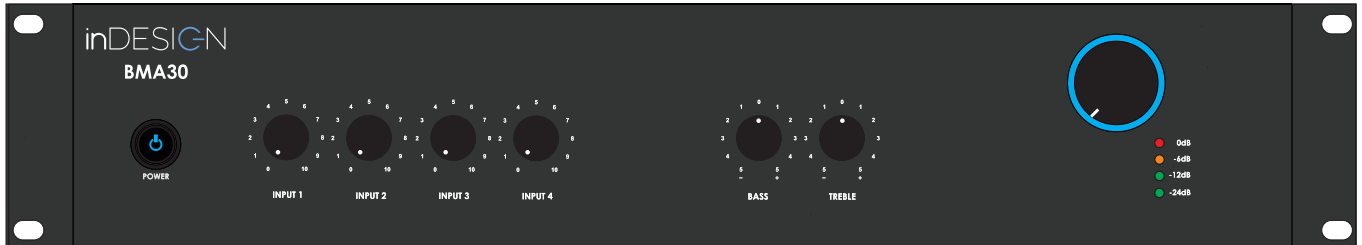

	BMA30	BMA60	BMA120	BMA240
Output power	30w	60w	120w	240w
AC power supply	230VAC - 240VAC			
Output low impedance	4 ohms - 8 ohms			
Hi impedance output	70V / 160 ohms, 100V / 320 ohms	70V / 80 ohms, 100V / 160 ohms	70V / 40 ohms, 100V / 80 ohms	70V / 20 ohms, 100V / 41 ohms
Input sensitivity	Microphone balanced XLR, 1mV, Line RCA 500mV			
Frequency response	50Hz-18Khz, + / -2dB at -3dB rated power			
Noise floor	8mV at 100V output	10mV at 100V output	9mV at 100V output	8mV at 100V output
THD (at -3dB rate power)	0.21%	0.22%	0.40%	0.5%
Tone control	Bass 100Hz ± 10dB, Treble 10kHz ± 10dB			
Control	Input level, tone control, master level, VOX			
VOX	CH1 has priority over CH2, 3, 4. (AFL)			
Phantom power	48V at CH1 MIC XLR			
Cooling	Convection cooling			Fan cooling, Thermal control
Protection	Thermal protected at 95°, muted input, short circuit, overload			
Level meter	LED meter, range -24dB / 0dB			
Size (mm)	488 x 88 x 275	485 x 88 x 275	485 x 88 x 275	485 x 88 x 315
Weight (kg Net)	6.5	7.6	8.7	11

<b>BMA30</b>	30 watt Basic Mixer Amplifier with 4 mic/line inputs and vox priority with 48V phantom power on mic 1, 2RU
<b>BMA60</b>	60 watt Basic Mixer Amplifier with 4 mic/line inputs and vox priority with 48V phantom power on mic 1, 2RU
<b>BMA120</b>	120 watt Basic Mixer Amplifier with 4 mic/line inputs and vox priority with 48V phantom power on mic 1, 2RU
<b>BMA240</b>	240 watt Basic Mixer Amplifier with 4 mic/line inputs and vox priority with 48V phantom power on mic 1, 2RU