



Output Transformer Units

# OT-4240/4480/4960



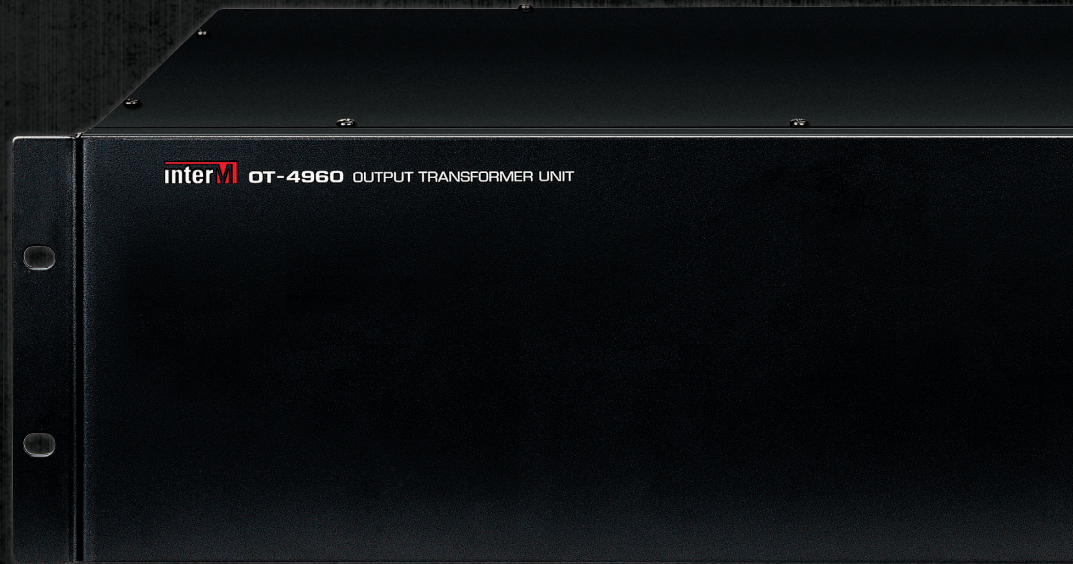

# OUTPUT TRANSFORMER UNITS

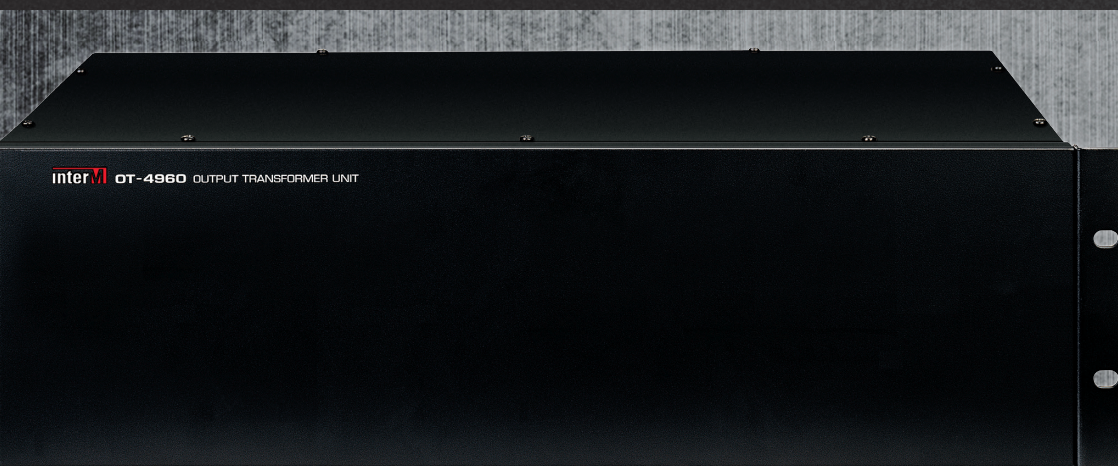

## Overview

The OT-4240/4480/4960 are 60, 120 or 240 watt high impedance transformers. They provide a professional way to install transformers in an equipment rack. The units transform the 4Ω output of any power amplifier to a 70V or 100V level for use with high impedance speakers (distributed systems). The OT-4240/4480/4960 are 60, 120 or 240 watt high impedance transformers.

## FEATURES

### BRING DISTRIBUTED AUDIO TO YOUR SYSTEM

Transforms the 4Ω output of the Inter-M QD-4240/4480/4960 to a 70V or 100V output level for use with high-impedance speaker systems.

### FLEXIBLE OPERATION

Four independent channels allow for four mono or two stereo zones.

### EXPANDABLE AND ADAPTABLE

Line Out expansion port for additional OT-4240/4480/4960 units.



# Front Panel




OT-4240/4480



OT-4960

# Rear Panel

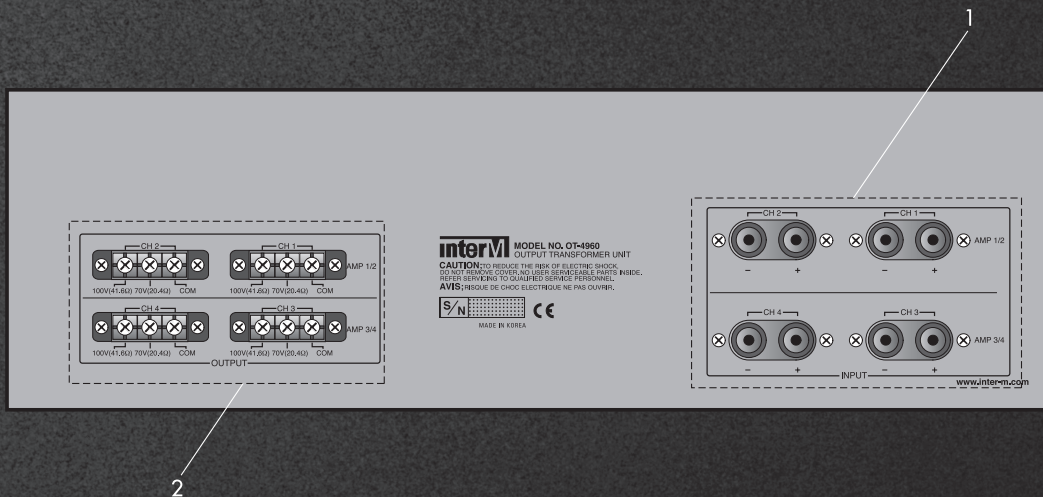

1 AMP INPUT TERMINALS

2 SPEAKER OUTPUT TERMINALS



## Specifications

		OT-4240	OT-4480	OT-4960
Rated Output	25V	10.4Ω	5.2Ω	—
	70V	81.7Ω	40.8Ω	20.4Ω
	100V	166.7Ω	83.3Ω	41.6Ω
Input	4Ω	60W	120W	240W
Frequency Response		20Hz-20kHz		
Weight		11.5kg/25.3lb	14.5kg/32lb	21.5kg/47.4lb
Dimensions (W x H x D)		482 x 88 x 310mm 19 x 3.5 x 12.2in		482 x 132 x 310mm 19 x 5.2 x 11in

The chart below shows recommended impedances

	100V	70V	25V
OT-4240 / 120VAC		81.7Ω	10.4Ω
OT-4240 / 230VAC	166.7Ω	81.7Ω	
OT-4480 / 120VAC		40.8Ω	5.2Ω
OT-4480 / 230VAC	83.3Ω	40.8Ω	
OT-4960 / 120VAC		20.4Ω	
OT-4960 / 230VAC	41.6Ω	20.4Ω	

### Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea  
Overseas Sales Team

Tel\_ +82-2-2289-8141~7 Fax\_ +82-2-2289-8149 E-mail\_ overseas@inter-m.com

www.inter-m.com

※ Design and specification are subject to be changed for the improvement of product quality without pre notice.

2015. 6. V1

