

Battery Charger

PB-6207



Battery Charger

PB-6207



The PB-6207 is a unit for recharging the battery to insure that the battery's maximum charge capacity is achieved.


- **BATTERY Auto Recharging**
 - It charges with maximum 3A, when it close to full charging (26.4V) the electric current will be reduced up to 10mA~20mA for maintaining a full charging
- **Voltage/Current Display**
 - Front LCD displays status of power distribution
- **PC Monitoring**
 - The charging voltage and current can be monitored by window program of 6000 system

FRONT/REAR PANEL



- 1 VOLT METER
- 2 AMPERE METER

- 3 POWER LED
- 4 POWER SWITCH

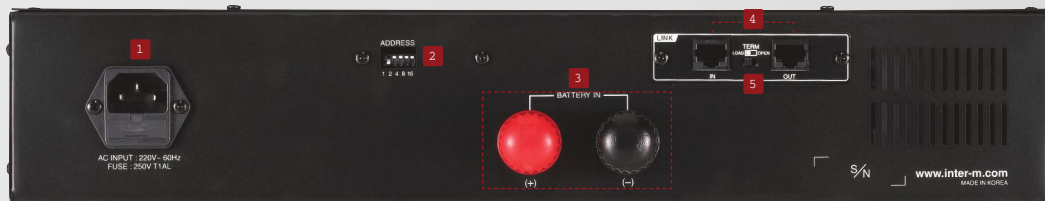

- 1 AC POWER INPUT TERMINAL
- 2 ADDRESS SETTING SWITCH
- 3 BATTERY CONNECTING TERMINAL

- 4 LINK IN/OUT TERMINAL
- 5 TERMINATION SWITCH


Battery Charger

PB-6207

SPECIFICATIONS

	PB-6207
Charge Complete Voltage	26.4V
Starting Current	3A MAX
Operation Temperature	-10℃ ~ +40℃
Power Source	100-120VAC or 220-240VAC; 50/60Hz (Supplied AC mains transformer depends on country requirements)
Power Consumption	120W
Weight (SET)	6kg/13.2lb
Dimensions (SET)	482(W)x88(H)x280(D)mm/19(W)x3.5(H)x11(D)in

※ Specifications and design are subject to change without notice.

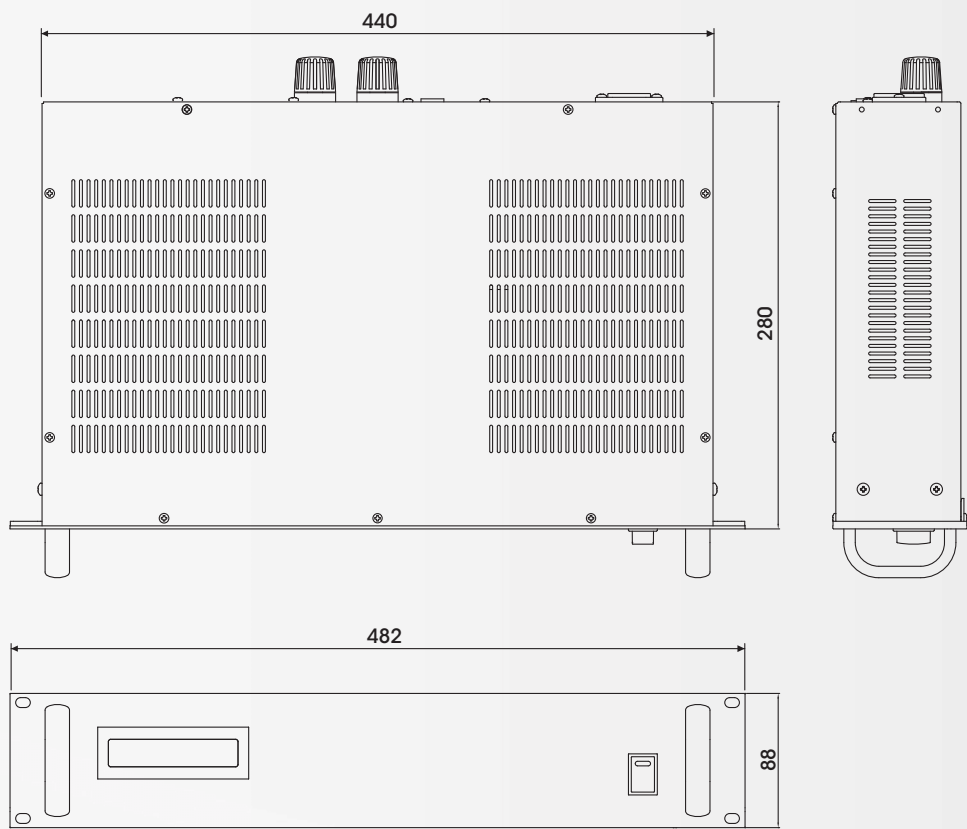



Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team

Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com

www.inter-m.com