

Staff Loudspeaker Unit with Dual Mute Switch | Setup Guide

STS-SU1-3W-B / STS-SU1-3W-G




Product Overview

Our free-standing combined speaker and directional microphone module for the staff side has an integral loudspeaker, microphone with a semi-rigid stem, adjustable neck and dual mute switch.

The dual mute switch gives the following options when used with a window intercom system:


- Sound working on both staff and customer sides
- Mute the staff side
- Mute both staff and customer sides

STS-A31 Amplifier Rear

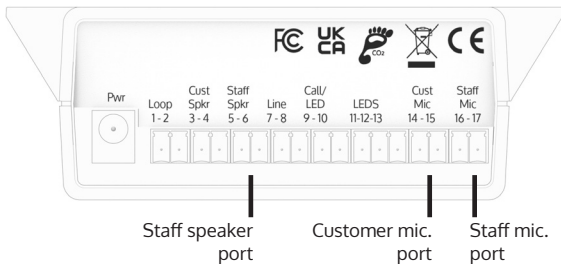

Connections

See **page 1** for a **diagram** showing the rear of the amplifier.



1. Connect **the customer side microphone cable** to the male euroblock connector (1).
2. Black and yellow cables go to amplifier ports 5 [black] and 6 [yellow].
3. Purple and brown cables connect to amplifier ports 14 [purple] and 15 [brown].
4. White and red cables go to amplifier ports 16 [white] and 17 [red].

Note: A customer side speaker will connect directly to amplifier ports 3 and 4.

Controls



Staff Mic: Mutes staff microphone only

On: Staff and customer microphone live

Dual Mute: Staff and customer microphone muted



UK & ROW
+44 (0) 1732 223900
sales@contacta.co.uk

US & Canada
+1 616 392 3400
info@contactainc.com

www.contacta.co.uk