


ULWIII

ULWIII 0.9 Ultra-thin Front Maintenance 16:9 LED Display Unit



Product features:

1. Thickness of 45mm, ultra-thin and ultra-light design.
2. Front and rear installation ,full front maintenance.
3. XYZ six-way adjustment.

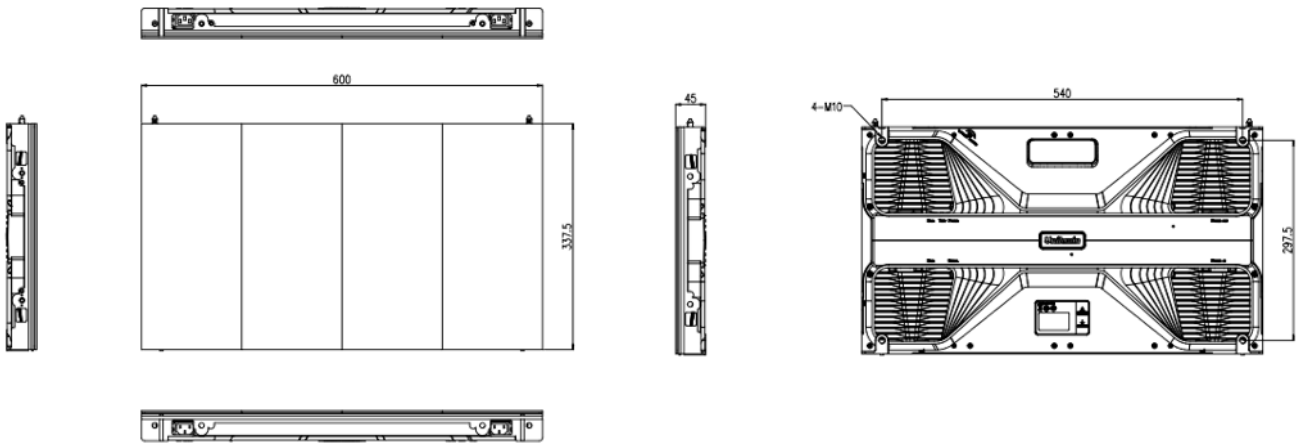

Main Technical Specifications:

Parameter	Value
Pixel Pitch	0.9375
LED Type	IMD
Brightness	600cd/ m ²
Pixels Per Module	160x360pixels
Pixel Density	1137777pixels /m ²
Pixels Per Panel	640x360pixels
Module Size	150mmx337.5mm
Panel Size	600mmx337.5mmx45mm
Weight	5kg/panel
Maintenance	Front
Ingress Protection	Rear IP30
Curve	0°~+3° (Concave)
Planeness	≤0.15mm
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Color Temperature	2,000K-9,500K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	5000: 1
Input Power <Max>	135W/panel
Input Power <Typical>	60W/panel
Input Voltage	AC: 100~240 V
Processing Depth	16bit
Refresh Rate	1920-3840 Hz
Video Frame Rate	50/60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10℃~+40℃/ 10~80% RH
Storage Temperature/Humidity	-20℃~+60℃/ 10~85% RH
Certification	/

Note:

1. Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
2. The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.
3. Different configurations can achieve different refresh rates.