


ULWIII

ULWIII 1.5 Ultra-thin Front Maintenance 16:9 LED Display Unit



Product features:

1. Thickness of 45mm, ultra-thin and ultra-light design.
2. Front and rear installation ,full front maintenance.
3. XYZ six-way adjustment.

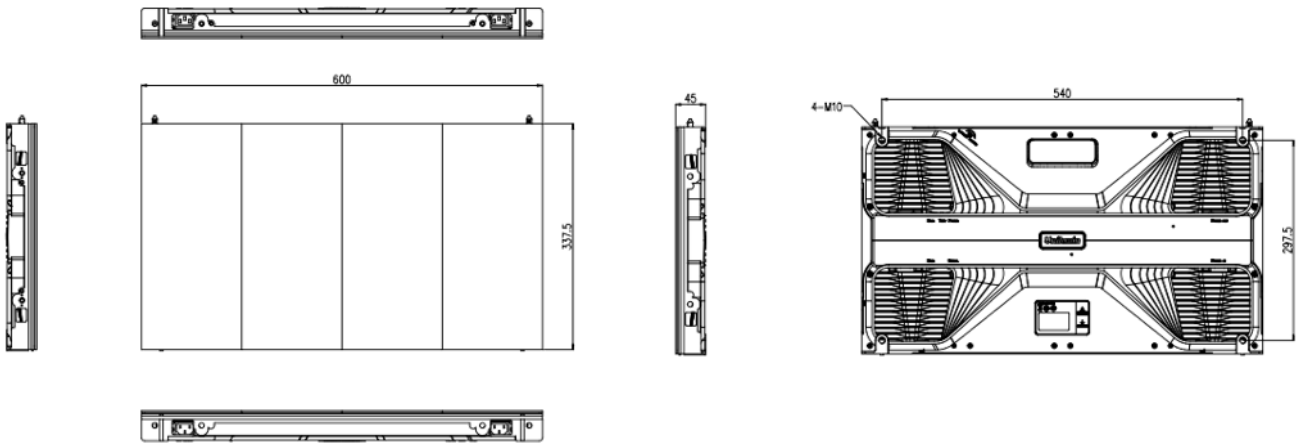

Main Technical Specifications:

Parameter	Value
Pixel Pitch	1.56
LED Type	3-in-1 SMD
Brightness	600cd/ m ²
Pixels Per Module	96x216pixels
Pixel Density	409600pixels /m ²
Pixels Per Panel	384x216pixels
Module Size	150mmx337.5mm
Panel Size	600mmx337.5mmx45mm
Weight	5kg/panel
Maintenance	Front
Ingress Protection	Rear IP30
Curve	0°~+7° (Concave)
Planeness	≤0.15mm
Material	Die-cast Aluminum
Calibration	Support brightness and chroma
Color Temperature	2,000K-9,500K Adjustable
Horizontal Viewing Angle	160°
Vertical Viewing Angle	160°
Contrast Ratio	5000: 1
Input Power <Max>	135W/panel
Input Power <Typical>	45W/panel
Input Voltage	AC: 100~240 V
Processing Depth	16bit
Refresh Rate	3840 Hz
Video Frame Rate	50/60Hz
LED Life Time	100,000 Hours
Operating Temperature/Humidity	-10℃~+40℃/ 10~80% RH
Storage Temperature/Humidity	-20℃~+60℃/ 10~85% RH
Certification	/

Note:

- Product pictures are for illustration only, the actual product effects (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.
- The specification parameters are reference values. Part of the data comes from Unilumin's internal laboratory and is obtained under a specific test environment. In actual use, it may be slightly different due to product batch differences, configuration differences, software versions, use conditions and environmental factors. Actual usage shall prevail.